

FLOWFRESH



HACCP International certified antimicrobial cementitious polyurethane floor coating systems, ideal for use in areas where hygiene is critical.

Flowfresh Range Technical Profile



Flowfresh represents a new generation of performance antimicrobial flooring based on the use of silver in partnership with Polygiene® that kills up to 99.9% of bacteria on contact.

Silver is a natural element known for its ability to purify and protect from bacterial infections — and provides an attractive, environmentally friendly alternative to chemically manufactured antimicrobials.

Offering total protection, a continuous migration of silver ions is delivered to the contact surface from where they attack gram positive and gram negative bacteria and viruses. This technology remains active for the lifetime of the floor, even when damaged or worn unlike coatings or surface treatments.

Flowfresh is HACCP International certified safe for use in food and beverage processing environments and meets the stringent ISO 22196 standard of evaluating the antimicrobial activity of antimicrobial treated plastics and other non-porous surfaces.

Application Suitability



Food Manufacturing



Bottling Plants & Breweries



Meat, Poultry & Seafood



Bakeries & Confectionery



Food Preparation



Healthcare & Pharmaceutical



Dairies & Hatcheries



Animal Care



Resistance Chart

BACTERIAL RESISTANCE

SARS-CoV	✓	Salmonella Typhi	✓
MRSA	✓	Enterococcus Faecalis	✓
E-coli	✓	Staphylococcus Aureus	✓
Listeria	✓	Streptococcus Pyogenes	✓
C.difficile	✓	Pseudomonas Aeruginosa	✓
Proteus Vulgaris	✓	Campila Bacta	✓

CHEMICAL RESISTANCE*

Hydrochloric Acid 10%	✓	Methanol	✓
Sulphuric Acid 10%	✓	Sugar Syrups	✓
Citric Acid 10%	✓	Caustic Soda	✓
Acetic Acid 5%	✓	Petrol	✓
Lactic Acid 10%	✓	Oil Ingredients	✓
Phosphoric Acid 5%	✓	Detergents	✓

*A chemical resistance chart is available on request.

System Components

	DESCRIPTION	USES
Flowfresh Coating Primer	3-component, polyurethane scratch coat / primer for concrete and cementitious substrates. Flowfresh Primer will bond to surface dry substrates that have a Relative Humidity up to 95% (ASTM F2170 (AS1884:2012)).	For priming concrete and screeds, prior to overcoating with the Flowfresh flooring system.
Flowfresh Coating	3-component, matte polyurethane cement sealer with low odour. Containing the antimicrobial additive, Polygiene®.	Used as a sealer to Flowfresh flooring systems e.g. Flowfresh SR.
Flowfresh Coating Satin	3-component, semi-gloss polyurethane cement sealer with low odour. Containing the antimicrobial additive, Polygiene®.	Used as a sealer to Flowfresh flooring systems e.g. Flowfresh SR.
Flowfresh Sealer	2-component, full gloss polyurethane sealer with low odour. Containing the antimicrobial additive, Polygiene®.	Used as a sealer to Flowfresh flooring systems e.g. Flowfresh SR.
Flowfresh SL	3-component, polyurethane cement base coat for the Flowfresh Range containing the antimicrobial additive, Polygiene®.	Used as a base coat to Flowfresh flooring systems e.g. Flowfresh SR.

Flowfresh SR (4-9 mm)

A heavy duty, chemical resistant, antimicrobial, polyurethane resin floor system, with a positively textured slip resistant finish.

Flowfresh SR is available in various thicknesses with a matte, semi-gloss or gloss finish and is designed for wet processing zones such as food manufacturing, preparation areas, commercial kitchens and chemical processing plants.



Antimicrobial:

Contains Polygiene® additive that kills up to 99.9% bacteria.



Thermal Resistant:

Resistant to temperatures up to 120°C and freeze/thaw resistant.




Certified:

HACCP International certified polyurethane flooring system.



Slip Resistant:

Impressive anti-slip profile in dry and wet conditions.

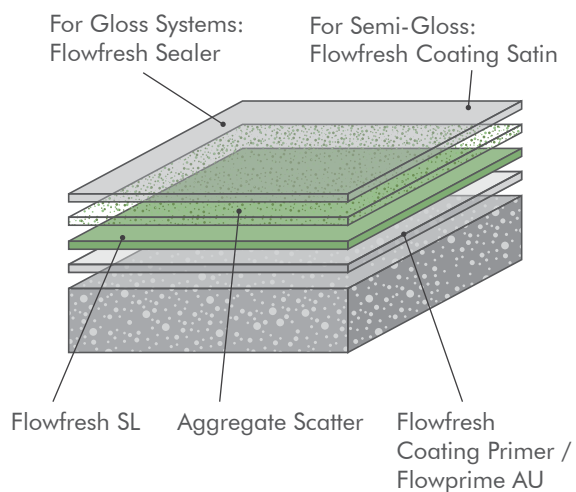

Technical Profile: Flowfresh SR

	4 mm			6 mm			9 mm	
	Matte	Semi-Gloss	Gloss	Matte	Semi-Gloss	Gloss	Matte	Semi-Gloss
FIRE RESISTANCE AS/ISO 9239.1	CHF Value: 10 kW/m ² Smoke Value: 69% (Mean)			CHF Value: 10 kW/m ² Smoke Value: 69% (Mean)			CHF Value: 10 kW/m ² Smoke Value: 69% (Mean)	
SLIP RESISTANCE* Method described in AS4586-2013	Dry & Wet Rating is dependent on specification			Dry & Wet Rating is dependent on specification			Dry & Wet Rating is dependent on specification	
IMPACT RESISTANCE EN ISO 6272	15 Nm			15 Nm			15 Nm	
TEMPERATURE RESISTANCE	-15°C to 65°C			-25°C to 90°C			-40°C to 120°C	
WATER PERMEABILITY Karsten Test	Nil			Nil			Nil	
VAPOUR PERMEABILITY ASTM E96:90	-			-			3 g / m ² / 24 hrs	
ABRASION RESISTANCE Taber Abrader	0.1 g loss per 1000 cycles (1 kg using CS17 wheels)			0.1 g loss per 1000 cycles (1 kg using CS17 wheels)			0.1 g loss per 1000 cycles (1 kg using CS17 wheels)	
COMPRESSIVE STRENGTH EN 13892-2	>50 N/mm ²			>50 N/mm ²			>50 N/mm ²	
FLEXURAL STRENGTH EN 13892-2	>20 N/mm ²			>20 N/mm ²			>20 N/mm ²	
TENSILE STRENGTH BS 6319	7 N/mm ²			7 N/mm ²			7 N/mm ²	
BOND STRENGTH ASTM D4541 (Pull-Off Test)	>1.5 MPa			>1.5 MPa			>1.5 MPa	
TOXICITY	Taint free to sensitive foodstuffs (when cured).			Taint free to sensitive foodstuffs (when cured).			Taint free to sensitive foodstuffs (when cured).	
SPEED OF CURE** Full Chemical Cure at 20°C	6 days			6 days			6 days	

*The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) — please contact our Technical Advisors for further details. **For full speed of cure details, contact our Technical Advisors.



Flowfresh SL (3 mm)

A pigmented, self-smoothing, chemical resistant, polyurethane resin-based floor finish containing Polygiene® antimicrobial additives.

Typically used in dry or semi-wet food processing and packaging zones.



Antimicrobial:

Contains Polygiene® additive that kills up to 99.9% bacteria.



Chemical Resistant:

Protects against corrosive ingredients and cleaning agents.



Certified:


HACCP International certified polyurethane flooring system.



Easy to Clean:

The self-smoothing finish is easy to maintain and sterilise.

Flowfresh SL

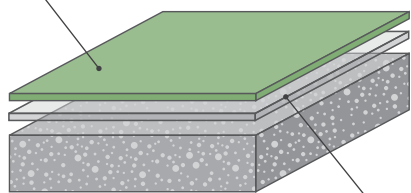

Flowfresh Coating Primer / Flowprime AU

Technical Profile

FIRE RESISTANCE	
EN 13501-1	B _{FL} -s1
SLIP RESISTANCE*	
Method described in AS4586-2013	Dry & Wet Rating is dependent on specification
IMPACT RESISTANCE	
BS8204 Part 1 Cat: A (<0.8 mm) ISO 6272	1 kg weight > 1.8 m 2 kg weight > 1.5 m
TEMPERATURE RESISTANCE	
5°C to 65°C	
COEFFICIENT OF THERMAL EXPANSION	
ASTM C531	5.70 × 10 ⁻⁵ °C ⁻¹
WATER PERMEABILITY	
Karsten Test	Nil (Impermeable)
ABRASION RESISTANCE	
Taber Abrader	0.1g loss per 1000 cycles (1 kg using CS17 wheels)
COMPRESSIVE STRENGTH	
EN 13892-2	>50 N/mm ²
FLEXURAL STRENGTH	
EN 13892-2	>20 N/mm ²
TENSILE STRENGTH	
EN 13892-2	> 10 N/mm ²
BOND STRENGTH	
ASTM D4541 (Pull-Off Test)	> 1.5 MPa
TOXICITY	
Taint free to sensitive foodstuffs (when cured).	
SPEED OF CURE**	
Full Chemical Cure at 30°C	6 days

*The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) — please contact our Technical Advisors for further details. **For full speed of cure details, contact our Technical Advisors.

Flowfresh SL (4 mm)

A pigmented, self-smoothing, chemical resistant, polyurethane resin-based floor finish containing Polygiene® antimicrobial additives.

Typically used in dry or semi-wet food processing and packaging zones.



Antimicrobial:

Contains Polygiene® additive that kills up to 99.9% bacteria.



Chemical Resistant:

Protects against corrosive ingredients and cleaning agents.



Certified:


HACCP International certified polyurethane flooring system.



Easy to Clean:

The self-smoothing finish is easy to maintain and sterilise.

Flowfresh
Coating Primer /
Flowprime AU

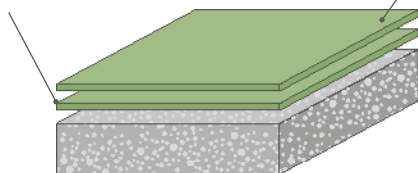

Flowfresh SL

Technical Profile

FIRE RESISTANCE			
EN 13501-1	B _{FL} - s1		
SLIP RESISTANCE			
Method described in AS4586-2013	P1		
IMPACT RESISTANCE			
EN ISO 6272	15Nm		
TEMPERATURE RESISTANCE			
From 0°C to 70°C			
COEFFICIENT OF THERMAL EXPANSION			
ASTM C531	5.70 x 10 ⁻⁵ °C ⁻¹		
WATER PERMEABILITY			
Karsten Test	Nil (impermeable)		
VAPOUR PERMEABILITY			
ASTM E96:90	5g/m ² /24hrs (at 4mm thick)		
ABRASION RESISTANCE			
Taber Abrader	0.1g loss per 1000 cycles (1kg using CS17 wheels)		
COMPRESSIVE STRENGTH			
EN 13892-2	50N/mm ²		
FLEXURAL STRENGTH			
EN 13892-2	20 N/mm ²		
TENSILE STRENGTH			
BS6319	7N/mm ²		
BOND STRENGTH			
ASTM D4541 (Pull-Off Test)	> 1.5MPa		
VOC CONTENT			
ASTM D2369-10: 2015	< 140 g/L		
SPEED OF CURE*			
	10 °C	20 °C	30 °C
Foot Traffic	36 h	24 h	12 h
Vehicular Traffic	72 h	48 h	24 h
Full Chemical Cure	10 d	7 d	6 d

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity. Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet/dry). Please contact our Technical Advisers for further details.



Flowfresh SRQ (4 mm)

A heavy duty, chemical resistant and hygienic hybrid resin flooring system with a decorative coloured quartz finish.

Typically used in internal wet processing and food preparation areas.



Rapid Curing:

MMA additives speed up cure time, reducing construction schedules.



Thermal Resistant:

Tolerant of sustained temperatures up to 70°C.



Resistant:

Holds its own against impact, traffic and chemical attack.




Slip Resistant:

Provides slip resistance for traction underfoot.

Flowfast Flexible Sealer / Flowtex Sealer

Coloured Quartz Scatter

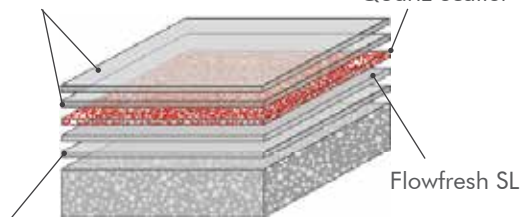

Flowfresh Coating Primer / Flowprime AU

Technical Profile

FIRE RESISTANCE - AS/ISO 9239.1	
CHF Value	>11 kW/m ²
Smoke Value	<4 kW/m ²
SLIP RESISTANCE	
Method described in AS4586-2013	P5 (Based on 0.6mm-1.0mm Quartz Sand Aggregate)
IMPACT RESISTANCE	
EN ISO 6272	10Nm
TEMPERATURE RESISTANCE	
Tolerant of sustained temperatures up to 70°C	
WATER PERMEABILITY	
Karsten Test	Nil (impermeable)
CHEMICAL RESISTANCE	
Contact Technical Department	
ABRASION RESISTANCE	
Taber Abrader	0.1g loss per 1000 cycles (1kg using CS17 wheels)
COMPRESSIVE STRENGTH	
EN 13892-2	60 N/mm ²
FLEXURAL STRENGTH	
EN 13892-2	20 N/mm ²
TENSILE STRENGTH	
BS6319	15 N/mm ²
BOND STRENGTH	
ASTM D4541 (Pull-Off Test)	> 1.5MPa
SPEED OF CURE*	TOP COAT (BASED ON FLOWFAST FLEXIBLE SEALER)
Walk On	1 hr
Full Traffic & Chemical Cure	2 - 3 hrs

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity. Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet/dry). Please contact our Technical Advisers for further details.

Flowfresh SRQ (6 mm)

A heavy duty, chemical resistant and hygienic hybrid resin flooring system with a decorative coloured quartz finish.

Typically used internal wet processing and food preparation areas.



Rapid Curing:

MMA additives speed up cure time, reducing construction schedules.



Thermal Resistant:

Tolerant of sustained temperatures up to 70°C.



Resistant:


Holds its own against impact, traffic and chemical attack.



Slip Resistant:

Provides slip resistance for traction underfoot.

Flowfast Flexible Sealer /
Flowtex Sealer

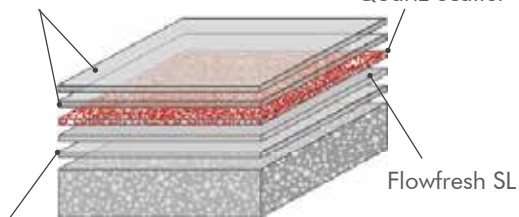

Flowfresh Coating Primer /
Flowprime AU

Technical Profile

FIRE RESISTANCE - AS/ISO 9239.1	
CHF Value	>11 kW/m ²
Smoke Value	<4 kW/m ²
SLIP RESISTANCE	
Method described in AS4586-2013	P5 (Based on 0.6mm-1.0mm sized Quartz Sand Aggregate)
IMPACT RESISTANCE	
EN ISO 6272	10Nm
TEMPERATURE RESISTANCE	
Tolerant of sustained temperatures up to 70°C	
WATER PERMEABILITY	
Karsten Test	Nil (impermeable)
CHEMICAL RESISTANCE	
Contact Technical Department	
ABRASION RESISTANCE	
Taber Abrader	0.1g loss per 1000 cycles (1kg using CS17 wheels)
COMPRESSIVE STRENGTH	
EN 13892-2	60 N/mm ²
FLEXURAL STRENGTH	
EN 13892-2	20 N/mm ²
TENSILE STRENGTH	
BS6319	15 N/mm ²
BOND STRENGTH	
ASTM D4541 (Pull-Off Test)	> 1.5MPa
SPEED OF CURE*	
	TOP COAT (BASED ON FLOWFAST FLEXIBLE SEALER)
Walk On	1 hr
Full Traffic & Chemical Cure	2 - 3 hrs

*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity. Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet/dry). Please contact our Technical Advisers for further details.

Altex Coatings Ltd

91-111 Oropi Road, Greerton
TAURANGA 3112
+64 7 541 1221

Part of



+64 7 541 1221



support@altexcoatings.co.nz



company/flowcrete-new-zealand



www.flowcrete.co.nz



Tremco CPG Australia

*Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Tremco CPG Australia Pty Ltd reserves the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.

